

Purchase at www.neutron.supply

Neutron Supply

255 East 17th Street, Paterson NJ 07525 Tel: 973.261.9596

E-Mail: info@neutron.supply www.neutron.supply

© 2023 Neutron Supply. All Rights Reserved

30W LED MINI PHOTOCELL SENSOR WALL PACK LIGHT

SPECIFICATIONS

SKU	OWF1006
Wattage	30W
Lumens	3,900lm
CCT	5000k
CRI	Ra>80
Input	120-277VAC
IP Rating	IP65
Sensor	PHOTOCELL SENSOR
Package Qty	Pack of 1 Unit
Replaces	150W Metal Halide
Warranty	5 Years
Lifespan	60,000 Hours
Product Size	9" x 6" x 3"
Certificates	UL/cUL, DLC 5.1 Premium

Zhaga BOOK18
Multifunction DOS



ACCESSORIES (SOLD SEPARATELY)




Sensor Control
SKU: RCMF1002

FEATURES

- Easy Installation
- Premium LED Chips
- Rugged Construction
- Starts Instantly
- Mercury-Free
- Low-Cost Maintenance
- Built-In Photocell Sensor
- 100 Degree Viewing Angle
- Eco-Friendly
- Rebate Eligible

APPLICATIONS

- Parking Garage Light
- Yard Light
- Outdoor Building Wall Pack



Purchase at www.neutron.supply

Neutron Supply
255 East 17th Street, Paterson NJ 07525 Tel: 973.261.9596
E-Mail: info@neutron.supply www.neutron.supply
© 2023 Neutron Supply. All Rights Reserved

30W LED MINI PHOTOCELL SENSOR WALL PACK LIGHT


DIMENSIONS



PHOTOCELL SENSOR FEATURE




The best feature of this mini wall pack is its built-in photocell sensor. It will turn-on automatically under insufficient ambient light. It also has a professional optical design with low-glare index. The lights are designed for multiple outdoor areas and so, it has different installation methods for different customer's needs.




INSTALL TYPE-1


1. Turn off the power




2. Loosen the 4 screws

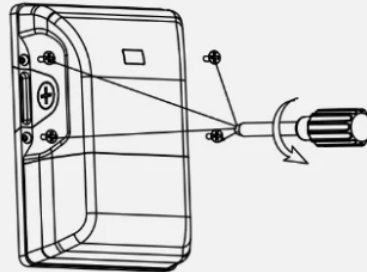


3. Remove the 1/2 end cap

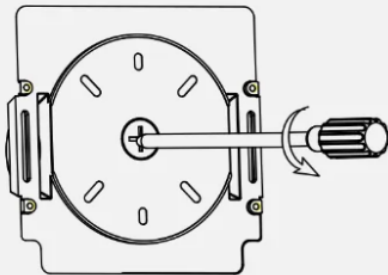


4. Peel off the yellow sticker and paste it on the round area of the bottom plate




5. Fix the bottom plate on the round plate

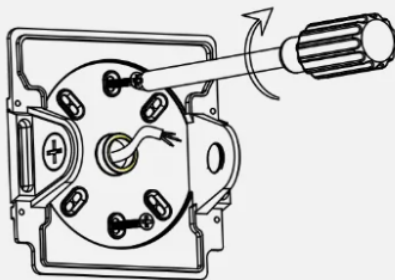


6. Make wiring connection and make sure the good protection

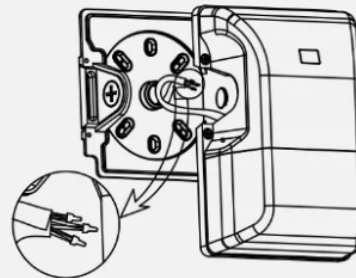


7. Fix the fixture by 4 screws

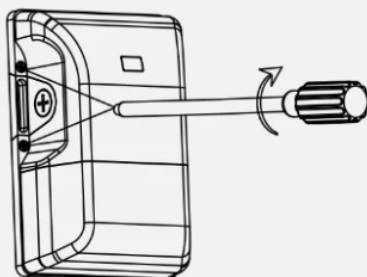

8. Make sure good wiring and screws fastening, then turn on the power






Purchase at www.neutron.supply

LED SENSOR REMOTE

- Detection Area** Short press to set detection area 25% / 50% / 75% / 100%
Long press (>3s) to transmit selected value
- Hold Time** Short press to set hold time 0S / 30S / 1min / 3min / 5min / 10min / 20min / 30min
Long press >3s to transmit selected value
- Daylight Threshold** Short press to set daylight threshold 5Lux / 15Lux / disable
Long press >3 to transmit selected value
When set daylight threshold to **disable**, sensor will switch on light when detect motion regardless of ambient brightness level
- Send** Short press to transmit all selected value on remote screen
- Stand-By Period** Short press to set standby period 0S / 30S / 1min / 3min / 5min / 10min / 20min / 30min / +∞
Long Press >3s to transmit selected value
- Stand-by DIM Level** Short press to set standby dimmin level 10% / 20% / 30% / 50%
Long Press >3s to transmit selected value
- Auto Mode** Short press to set working mode: MD = Motion + Daylight Priority (daylight switch) / Daylight Harvesting; P = Daylight priority / Daylight Harvesting
Long press >3s to transmit selected mode
Note: MP or P is not available for all models. Please follow spec sheet of motion sensor
- ON / OFF** When set light on, when power turn off and on again, light will be on. When set light off, when power turn off and on again, light will be on for 9 seconds and then off
- Motion Sensor** Short Press to quit from constant on/off mode, sensor start to work (the previous setting stays in validity)
- DIM+ / DIM-** Short press to set occupancy light level 50%-100% in MD mode; Set target lux level in MP (Motion+Daylight Harvesting) mode; Dim level will change 5% each time button is pressed
- Reset** Detection Area: 100%; Hold Time: 30min Daylight Sensor: Disable; Stand-by Period: 30min; Stand-by Dim Level: 30%
- Quick Settings** Option 1. Short press to show setting configuration, long press >3s to save this configuration. Press "send" to transmit selected quicksetting
Option 2. Short press to show the setting configuration, long press>3s to save this configuration. Press "send" to transmit selected quicksetting
- H/L** Short press to set high **H** sensitivity (open application; **L** low sensitivity (applied in reflection surface around area)
- S** N/A



SKU: RCMF1002



Purchase at www.neutron.supply

Neutron Supply
255 East 17th Street, Paterson NJ 07525 Tel: 973.261.9596
E-Mail: info@neutron.supply www.neutron.supply
© 2023 Neutron Supply. All Rights Reserved

30W LED MINI PHOTOCELL SENSOR WALL PACK LIGHT

Project Name:
Type:
Catalog Number:
Voltage:
Approved By:
Date: